


## JVRS Series: High Performance Satellite

2-way, 3-way(balanced & unbalanced), 4-way, 8-way(Vertical)

- \* 15-2150MHz Operation
- \* Concave solder back design

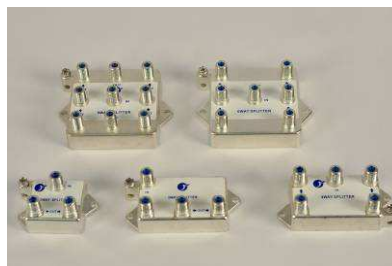

ITEM	Frequency	2way	3way	3way-UB	4way	8way
	MHz	dB	dB	dB	dB	dB
<b>INSERTION LOSS (MAX.)</b>	<b>15</b>	4.2	6.7	5.0/9.5	9.0	15.0
	<b>950</b>	4.5	7.5	6.0/10.5	10.2	15.5
	<b>1450</b>	5.5	9.3	6.5/11.5	11.5	16.0
	<b>2150</b>	6.0	11.5	6.8/12.5	12.5	17.0
<b>ISOLATION (MIN.)</b>	<b>15</b>	15	15	20	16	16
	<b>950</b>	22	20	20	16	18
	<b>1450</b>	25	20	22	13	16
	<b>2150</b>	22	18	22	13	15
<b>RETURN LOSS IN (MIN.)</b>	<b>15</b>	14	15	12	14	12
	<b>950</b>	16	13	15	14	12
	<b>1450</b>	16	12	15	14	12
	<b>2150</b>	16	12	15	14	12
<b>RETURN LOSS OUT (MIN.)</b>	<b>15</b>	12	13	12	10	14
	<b>950</b>	16	12	15	14	14
	<b>1450</b>	16	12	15	14	13
	<b>2150</b>	16	12	15	14	13
<b>DC PASS</b>	Depending on customer require					