嘉捷電子工業股份有限公司
JJS Communications Co., Ltd.

Fiber adaptor SC to UPC/APC with Flange / Flangeless	Model: SCUPC/SCUPCFL SCAPC/SCAPCFL
Date: 2022/08/18	Rev.: 02

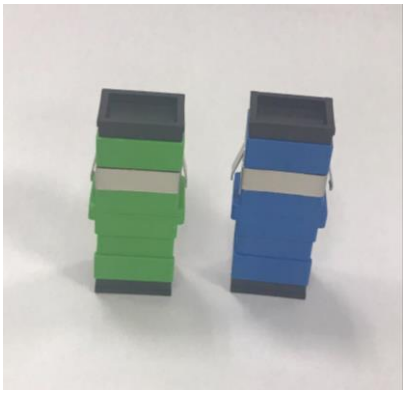



ELECTRICAL SPECIFICATION

ITEM	SPECIFICATION	
WAVE LENGTH	1310 / 1550nm	
INSERTION LOSS @1310nm	</= 0.2dB	
RETURN LOSS	APC>/=65 (green)	UPC>/=50 (blue)
DURABILITY	</= 0.2dB typical change, 1000 mating	
TEMPERATURE	-40~70℃	